

GLOBAL PROFESSIONAL LIGHTING BRAND
FOR CULTURAL RELICS EXHIBITION AND DISPLAY

CYBEST LIGHTING PAYS TRIBUTE
TO THE ART OF TIME WITH LIGHT

SELF Electronics Co.,Ltd.(Headquarters)

📍 No. 1345 JuXian Road, Hi-Tech Park, Ningbo, China 315103
☎ +86-574-2880-5765
+86-574-2880-5658 (for English assistance)
+86-574-2880-5678 (for Chinese assistance)
✉ sales@self-electronics.com
📠 +86-574-28805656

SELF Electronics Germany GmbH

📍 August-Horch-Str.7, D-51149, Köln
☎ +49-2203-18501-0
✉ saleseu@self-electronics.com
📠 +49-2203-18501-199

SELF Technology Co.,Ltd.

📍 No. 1345 JuXian Road, Hi-Tech Park, Ningbo, China 315103
☎ +86-574-2880-5678
✉ selfbwg@self.cn

SELF Electronics USA Corporation

📍 3264 Saturn Ct, Peachtree Corners, GA 30092
☎ +1-770-248-9023
✉ salesus@self-electronics.com
📠 +1-770-248-9028

SELF Lighting Technology Pty Ltd.

📍 G01, 1 Elland Ave, Box Hill, Melbourne, 3128, Australia
☎ +61-41686 8998
✉ Lexi.xu@self-electronics.com

SELF Electronics Middle East DMCC

📍 1707, Opal Tower, Business Bay, Dubai
☎ +971-585930588
✉ salesme@self-electronics.com



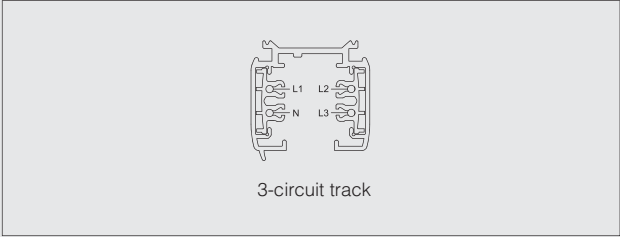
CB6 Series



Product description

- 1.5 SCDM LED module.
- Housing: Cast aluminium, powder-coated.
- High flexibility in 365° rotatable and 90° tiltable.
- Adapter for 220-240V track.
- LED module: High-power LEDs on metal-core PCB.
- Lens: Collimating lens made of optical polymer.
- Ta: -20~35 C

Mounting



1 Optical filter

High-precision micro-lattice lenses with very multi-angle configurations. Different configurations allow you to control the light wherever you want it to go.

2 Array collimating lens

High-precision collimating lens technology, the original 120 ° luminous LED light Angle control in a very small Angle and maintain 93% of the extremely high emission efficiency. The emitted light energy can be easily utilized by the lower optical system.

3 Flicker-free

Regardless of the brightness level, the light output remains stable and uniform, preventing flicker interference when shooting videos or photos.

4 LED module

High quality high power LED chip. By accurately controlling the current of each LED, the LED can work at the best balance between temperature and efficiency. Even the Neutral color temperature light efficiency of the ultra-high CRI can be up to 80lm/W.

5 Smart power supply

The built-in intelligent LED power supply will provide energy for the precision optical system components and ensure the accuracy of dimming performance achieving stable control with accuracy up to 0.1%.

6 Luminaire system

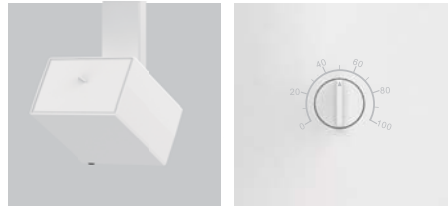
Professional modular system design and high-quality optical characteristics, different sizes of luminaires can cover all application scenarios, giving designers full flexibility in different Spaces to use the combination of CYBEST LED luminaires.

7 Stable rotation mechanism


The fixture allows for easy multi-angle adjustment and maintains the set direction steadily, ensuring the light consistently shines on the intended spot.

8 Dimming

The dimming knob is hidden behind luminaire body and allows precise adjustment of the light without additional tools.



Model 1

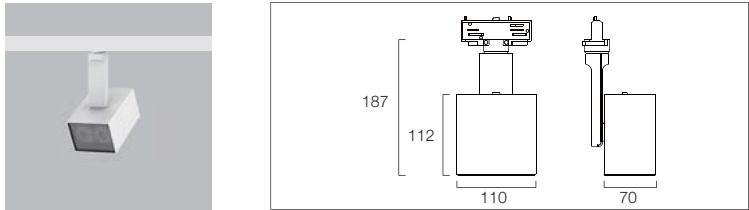

CB6-W4NAA / CB6-B4NAA

Technical data

6.2 W / 310 lm ^[1]	3000K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.434,0.403)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D(m)
			5°
	1	19548	0.09
	2	4887	0.17
	3	2172	0.26
	4	1222	0.35
	5	782	0.44

Light distribution

Narrow Spot

Weight

0.99 kg

CB6-W4NAB / CB6-B4NAB

Technical data

6.2 W / 330 lm ^[1]	3500K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.407,0.392)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D(m)
			5°
	1	20809	0.09
	2	5202	0.17
	3	2312	0.26
	4	1301	0.35
	5	832	0.44

Light distribution

Narrow Spot

Weight

0.99 kg

CB6-W4NAC / CB6-B4NAC

Technical data

6.2 W / 350 lm ^[1]	4000K-Neutral White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.382,0.380)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D(m)
			5°
	1	22070	0.09
	2	5517	0.17
	3	2452	0.26
	4	1379	0.35
	5	883	0.44

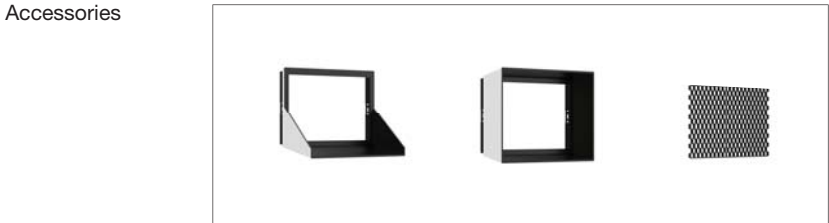
Light distribution

Narrow Spot


Weight

0.99 kg

[1]: Measurement precision accordance with Commission Delegated Regulation (EU)2019/2015.



Model 2

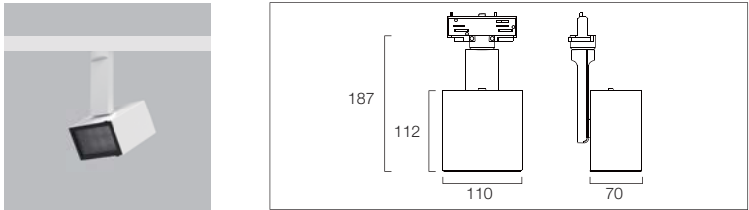

Technical data

14 W / 930 lm ^[1]	3000K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.434,0.403)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D(m)
	1	13572	0.21
	2	3393	0.42
	3	1508	0.63
	4	848	0.84
	5	543	1.05

Light distribution

Spot

Weight

0.97 kg

Technical data

14 W / 980 lm ^[1]	3500K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.407,0.392)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D(m)
	1	14302	0.21
	2	3575	0.42
	3	1589	0.63
	4	894	0.84
	5	572	1.05

Light distribution

Spot

Weight

0.97 kg

Technical data

14 W / 1030 lm ^[1]	4000K-Neutral White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.382,0.380)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D(m)
	1	15031	0.21
	2	3758	0.42
	3	1670	0.63
	4	939	0.84
	5	601	1.05

Light distribution

Spot

Weight

0.97 kg

Technical data

14 W / 930 lm ^[1]	3000K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.434,0.403)
Dimming range (Flicker free)	0.1%-100%

Photometrics


	h(m)	E(lx)	D(m)
	1	5938	0.43
	2	1485	0.85
	3	660	1.28
	4	371	1.70
	5	238	2.13

Light distribution


Flood


Weight

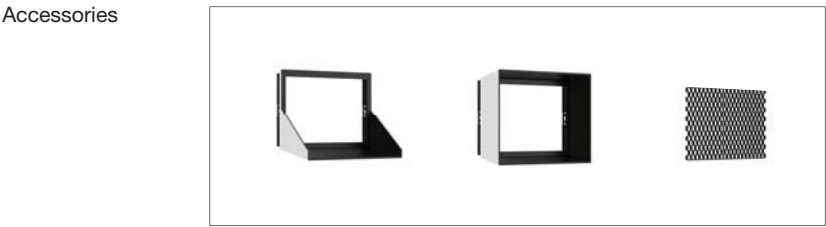
0.97 kg





Model 2

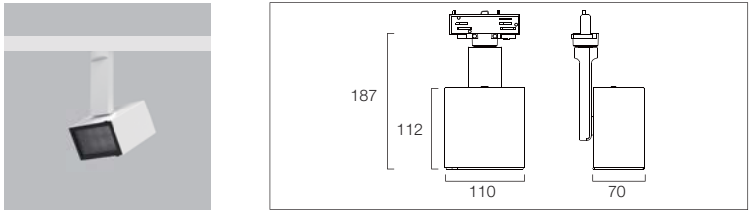


Technical data	CB6-W12FAB / CB6-B12FAB	
	14 W / 980 lm ^[1]	3500K-Warm White
	Colour rendition index (Typ.)	Ra.97 R9.90
	Target Center Point (cx, cy)	(0.407,0.392)
Photometrics	Dimming range (Flicker free)	0.1%-100%
		
	h(m)	E(lx)
	1	6258
Light distribution	2	1564
	3	695
	4	391
	5	250
Weight	0.97 kg	

Technical data	CB6-W12FAC / CB6-B12FAC	
	14 W / 1030 lm ^[1]	4000K-Neutral White
	Colour rendition index (Typ.)	Ra.97 R9.90
	Target Center Point (cx, cy)	(0.382,0.380)
Photometrics	Dimming range (Flicker free)	0.1%-100%
		
	h(m)	E(lx)
	1	6577
Light distribution	2	1644
	3	731
	4	411
	5	263
Weight	0.97 kg	


Technical data	CB6-W12WFAA / CB6-B12WFAA	
	14 W / 930 lm ^[1]	3000K-Warm White
	Colour rendition index (Typ.)	Ra.97 R9.90
	Target Center Point (cx, cy)	(0.434,0.403)
Photometrics	Dimming range (Flicker free)	0.1%-100%
		
	h(m)	E(lx)
	1	2343
Light distribution	2	586
	3	260
	4	146
	5	94
Weight	0.97 kg	

Technical data	CB6-W12WFAB / CB6-B12WFAB	
	14 W / 980 lm ^[1]	3500K-Warm White
	Colour rendition index (Typ.)	Ra.97 R9.90
	Target Center Point (cx, cy)	(0.407,0.392)
Photometrics	Dimming range (Flicker free)	0.1%-100%
		
	h(m)	E(lx)
	1	2469
Light distribution	2	617
	3	274
	4	154
	5	99
Weight	0.97 kg	

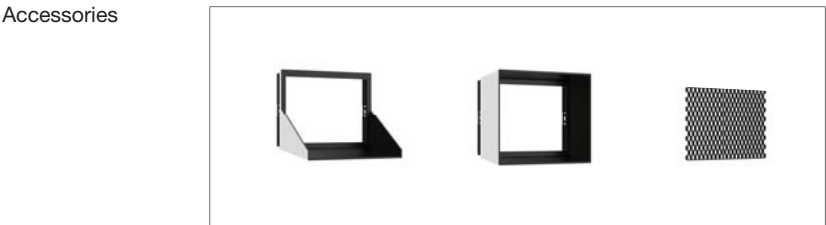[1]: Measurement precision accordance with Commission Delegated Regulation (EU)2019/2015.



Model 2

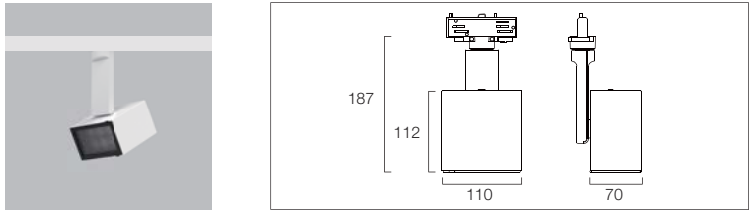

CB6-W12WFAC / CB6-B12WFAC

Technical data

14 W / 1030 lm ^[1]	4000K-Neutral White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.382,0.380)
Dimming range (Flicker free)	0.1%-100%

Photometrics




	h(m)	E(lx)	D(m)
			36°
	1	2595	0.65
	2	649	1.30
	3	288	1.95
	4	162	2.60
	5	104	3.25




Light distribution




Wide Flood

Weight


0.97 kg

CB6-W12EWFAA / CB6-B12EWFAA																							
14 W / 930 lm ^[1]		3000K-Warm White																					
Colour rendition index (Typ.)	Ra.97 R9.90																						
Target Center Point (cx, cy)	(0.434,0.403)																						
Dimming range (Flicker free)	0.1%-100%																						
	<table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td></td><td></td><td>48°</td></tr><tr><td>1</td><td>1498</td><td>0.89</td></tr><tr><td>2</td><td>374</td><td>1.78</td></tr><tr><td>3</td><td>166</td><td>2.67</td></tr><tr><td>4</td><td>94</td><td>3.56</td></tr><tr><td>5</td><td>60</td><td>4.45</td></tr></table>	h(m)	E(lx)	D(m)			48°	1	1498	0.89	2	374	1.78	3	166	2.67	4	94	3.56	5	60	4.45	
h(m)	E(lx)	D(m)																					
		48°																					
1	1498	0.89																					
2	374	1.78																					
3	166	2.67																					
4	94	3.56																					
5	60	4.45																					
																							
Extra Wide Flood																							
0.97 kg																							


CB6-W12EWFAB / CB6-B12EWFAB																							
14 W / 980 lm ^[1]		3500K-Warm White																					
Colour rendition index (Typ.)	Ra.97 R9.90																						
Target Center Point (cx, cy)	(0.407,0.392)																						
Dimming range (Flicker free)	0.1%-100%																						
	<table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td></td><td></td><td>48°</td></tr><tr><td>1</td><td>1578</td><td>0.65</td></tr><tr><td>2</td><td>395</td><td>1.30</td></tr><tr><td>3</td><td>175</td><td>1.95</td></tr><tr><td>4</td><td>99</td><td>2.60</td></tr><tr><td>5</td><td>63</td><td>3.25</td></tr></table>	h(m)	E(lx)	D(m)			48°	1	1578	0.65	2	395	1.30	3	175	1.95	4	99	2.60	5	63	3.25	
h(m)	E(lx)	D(m)																					
		48°																					
1	1578	0.65																					
2	395	1.30																					
3	175	1.95																					
4	99	2.60																					
5	63	3.25																					
																							
Extra Wide Flood																							
0.97 kg																							

CB6-W12EWFAC / CB6-B12EWFAC																				
14 W / 1030 lm ^[1]		4000K-Neutral White																		
Colour rendition index (Typ.)	Ra.97 R9.90																			
Target Center Point (cx, cy)	(0.382,0.380)																			
Dimming range (Flicker free)	0.1%-100%																			
	<table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>1</td><td>1659</td><td>0.65</td></tr><tr><td>2</td><td>415</td><td>1.30</td></tr><tr><td>3</td><td>184</td><td>1.95</td></tr><tr><td>4</td><td>104</td><td>2.60</td></tr><tr><td>5</td><td>66</td><td>3.25</td></tr></table>	h(m)	E(lx)	D(m)	1	1659	0.65	2	415	1.30	3	184	1.95	4	104	2.60	5	66	3.25	
h(m)	E(lx)	D(m)																		
1	1659	0.65																		
2	415	1.30																		
3	184	1.95																		
4	104	2.60																		
5	66	3.25																		
																				
Extra Wide Flood																				
0.97 kg																				

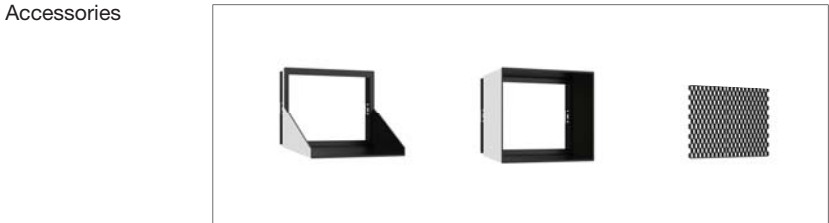[1]: Measurement precision accordance with Commission Delegated Regulation (EU)2019/2015.



Model 2

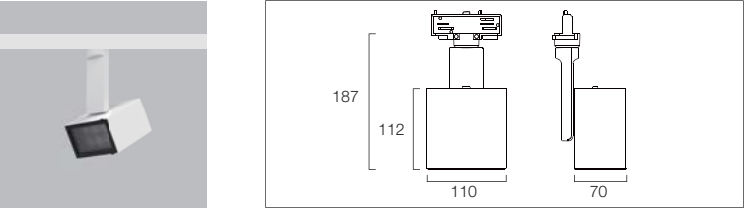

CB6-W12OFAA / CB6-B12OFAA

Technical data

14 W / 930 lm ^[1]	3000K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.434,0.403)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D-C0(m)	D-C90(m)
			16°	64°
1	2203	0.28	1.25	
2	551	0.56	2.50	
3	245	0.84	3.75	
4	138	1.12	5.00	
5	88	1.41	6.25	

Light distribution

Oval Flood

Weight

0.97 kg

CB6-W12OFAB / CB6-B12OFAB

Technical data

14 W / 980 lm ^[1]	3500K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.407,0.392)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D-C0(m)	D-C90(m)
			16°	64°
1	2321	0.28	1.25	
2	580	0.56	2.50	
3	258	0.84	3.75	
4	145	1.12	5.00	
5	93	1.41	6.25	

Light distribution

Oval Flood

Weight

0.97 kg

CB6-W12OFAC / CB6-B12OFAC

Technical data

14 W / 1030 lm ^[1]	4000K-Neutral White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.382,0.380)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D-C0(m)	D-C90(m)
			16°	64°
1	2439	0.28	1.25	
2	610	0.56	2.50	
3	271	0.84	3.75	
4	152	1.12	5.00	
5	98	1.41	6.25	

Light distribution

Oval Flood

Weight

0.97 kg

CB6-W12WWAA / CB6-B12WWAA

Technical data

14 W / 930 lm ^[1]	3000K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.434,0.403)
Dimming range (Flicker free)	0.1%-100%

Photometrics


	h(m)	E(lx)	D-C0(m)	D-C90(m)
			16°	64°
1	2439	0.28	1.25	
2	610	0.56	2.50	
3	271	0.84	3.75	
4	152	1.12	5.00	
5	98	1.41	6.25	

Light distribution


Wallwash
h:a:d=3:1:1.5

Weight



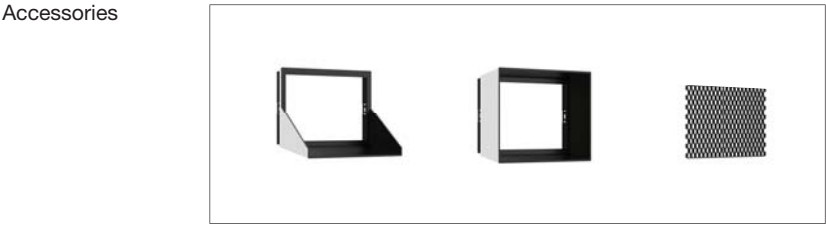
0.97 kg




Model 2

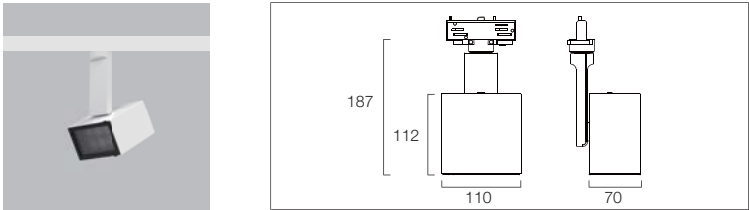




CB6-W12WWAB / CB6-B12WWAB

Technical data	14 W / 980 lm ^[1]		3500K-Warm White	
	Colour rendition index (Typ.)		Ra.97 R9.90	
	Target Center Point (cx, cy)		(0.407,0.392)	
	Dimming range (Flicker free)		0.1%-100%	
Photometrics			Mean illuminance En (wall) Angle of tilt 35° Wall height (m) 4.0 Offset from wall (m) 1.3 Luminaire spacing (m) 1.3 Illuminance En (lx) 141	
				
Light distribution	Wallwash h:a:d=3:1:1.5			
Weight	0.97 kg			

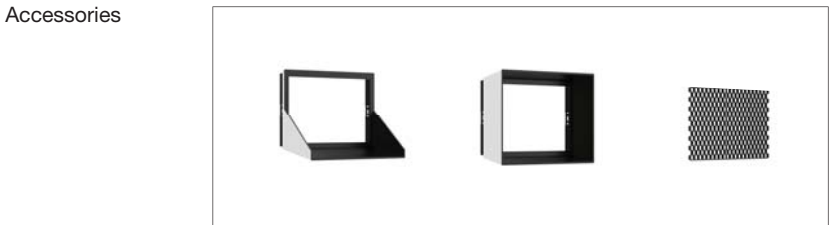
[1]: Measurement precision accordance with Commission Delegated Regulation (EU)2019/2015.



CB6-W12WWAC / CB6-B12WWAC

14 W / 1030 lm ^[1]		4000K-Neutral White	
Colour rendition index (Typ.)	Ra.97 R9.90		
Target Center Point (cx, cy)	(0.382,0.380)		
Dimming range (Flicker free)	0.1%-100%		
		Mean illuminance En (wall) Angle of tilt 35° Wall height (m) 4.0 Offset from wall (m) 1.3 Luminaire spacing (m) 1.3 Illuminance En (lx) 149	
			
Wallwash h:a:d=3:1:1.5			
0.97 kg			

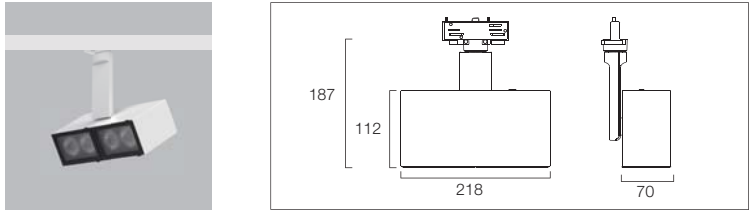Model 3



CB6-W8NAA / CB6-B8NAA

Technical data

10 W / 620 lm ^[1]	3000K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.434,0.403)
Dimming range (Flicker free)	0.1%-100%

Photometrics



	h(m)	E(lx)	D(m)
			5°
	1	39095	0.09
	2	9774	0.17
	3	4344	0.26
	4	2443	0.35
	5	1564	0.44



Light distribution

The image shows two diagrams illustrating the light distribution of the CB6-W8NAA / CB6-B8NAA. On the left, a side-view diagram shows a narrow beam of light (Narrow Spot) emanating from a fixture mounted on a wall, illuminating a person standing below. On the right, a top-down view shows the same beam of light illuminating a circular area on a flat surface.


Weight

1.55 kg


CB6-W8NAB / CB6-B8NAB																							
10 W / 660 lm ^[1]		3500K-Warm White																					
Colour rendition index (Typ.)	Ra.97 R9.90																						
Target Center Point (cx, cy)	(0.407,0.392)																						
Dimming range (Flicker free)	0.1%-100%																						
	<table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td></td><td></td><td>5°</td></tr><tr><td>1</td><td>41617</td><td>0.09</td></tr><tr><td>2</td><td>10404</td><td>0.17</td></tr><tr><td>3</td><td>4624</td><td>0.26</td></tr><tr><td>4</td><td>2601</td><td>0.35</td></tr><tr><td>5</td><td>1665</td><td>0.44</td></tr></table>	h(m)	E(lx)	D(m)			5°	1	41617	0.09	2	10404	0.17	3	4624	0.26	4	2601	0.35	5	1665	0.44	
h(m)	E(lx)	D(m)																					
		5°																					
1	41617	0.09																					
2	10404	0.17																					
3	4624	0.26																					
4	2601	0.35																					
5	1665	0.44																					
																							
Narrow Spot																							
1.55 kg																							

CB6-W8NAC / CB6-B8NAC			
10 W / 690 lm ^[1]		4000K-Neutral White	
Colour rendition index (Typ.)	Ra.97 R9.90		
Target Center Point (cx, cy)	(0.382,0.380)		
Dimming range (Flicker free)	0.1%-100%		
	h(m)	E(lx)	D(m)
			5°
	1	43509	0.09
	2	10877	0.17
	3	4834	0.26
	4	2719	0.35
	5	1740	0.44
			
Narrow Spot			
			
1.55 kg			

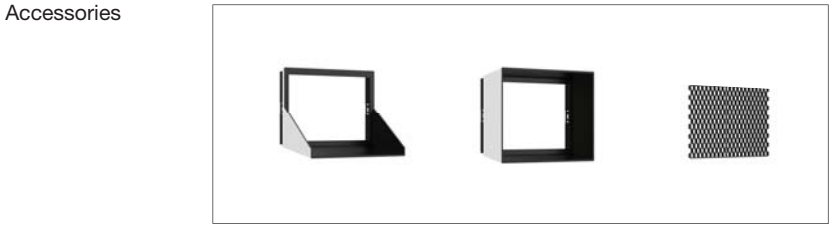[1]: Measurement precision accordance with Commission Delegated Regulation (EU)2019/2015.



Model 4

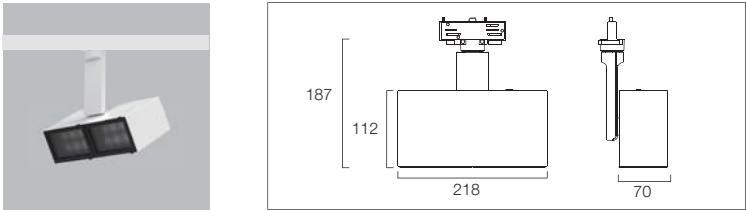

CB6-W24SAA / CB6-B24SAA

Technical data

27 W / 1860 lm ^[1]	3000K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.434,0.403)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D(m)
	1	27144	0.21
	2	6786	0.42
	3	3016	0.63
	4	1696	0.84
	5	1086	1.05

Light distribution

Spot

Weight

1.52 kg

CB6-W24SAB / CB6-B24SAB

Technical data

27 W / 1960 lm ^[1]	3500K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.407,0.392)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D(m)
	1	28603	0.21
	2	7151	0.42
	3	3178	0.63
	4	1788	0.84
	5	1144	1.05

Light distribution

Spot

Weight

1.52 kg

CB6-W24SAC / CB6-B24SAC

Technical data

27 W / 2050 lm ^[1]	4000K-Neutral White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.382,0.380)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D(m)
	1	29917	0.21
	2	7479	0.42
	3	3324	0.63
	4	1870	0.84
	5	1197	1.05

Light distribution

Spot

Weight

1.52 kg

CB6-W24FAA / CB6-B24FAA

Technical data

27 W / 1860 lm ^[1]	3000K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.434,0.403)
Dimming range (Flicker free)	0.1%-100%

Photometrics


	h(m)	E(lx)	D(m)
	1	11877	0.43
	2	2969	0.85
	3	1320	1.28
	4	742	1.70
	5	475	2.13

Light distribution


Flood



Weight


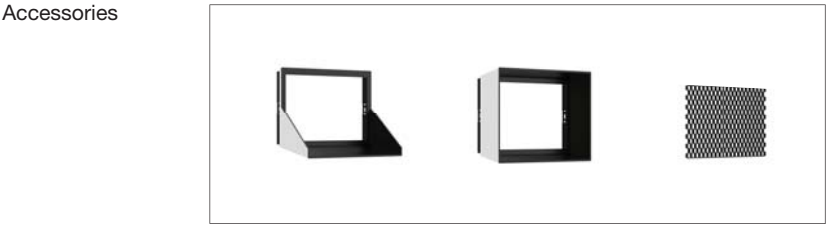
1.52 kg







Model 4

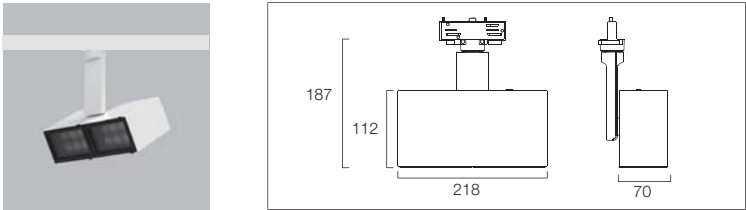


Technical data	CB6-W24FAB / CB6-B24FAB																		
	27 W / 1960 lm ^[1]	3500K-Warm White																	
	Colour rendition index (Typ.)	Ra.97 R9.90																	
	Target Center Point (cx, cy)	(0.407,0.392)																	
	Dimming range (Flicker free)	0.1%-100%																	
Photometrics																			
	<table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>1</td><td>12515</td><td>0.43</td></tr><tr><td>2</td><td>3129</td><td>0.85</td></tr><tr><td>3</td><td>1391</td><td>1.28</td></tr><tr><td>4</td><td>782</td><td>1.70</td></tr><tr><td>5</td><td>501</td><td>2.13</td></tr></table>	h(m)	E(lx)	D(m)	1	12515	0.43	2	3129	0.85	3	1391	1.28	4	782	1.70	5	501	2.13
h(m)	E(lx)	D(m)																	
1	12515	0.43																	
2	3129	0.85																	
3	1391	1.28																	
4	782	1.70																	
5	501	2.13																	
Light distribution																			
	Flood																		
Weight	1.52 kg																		

Technical data	CB6-W24FAC / CB6-B24FAC																		
	27 W / 2050 lm ^[1]	4000K-Neutral White																	
	Colour rendition index (Typ.)	Ra.97 R9.90																	
	Target Center Point (cx, cy)	(0.382,0.380)																	
	Dimming range (Flicker free)	0.1%-100%																	
Photometrics																			
	<table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>1</td><td>13090</td><td>0.43</td></tr><tr><td>2</td><td>3273</td><td>0.85</td></tr><tr><td>3</td><td>1454</td><td>1.28</td></tr><tr><td>4</td><td>818</td><td>1.70</td></tr><tr><td>5</td><td>524</td><td>2.13</td></tr></table>	h(m)	E(lx)	D(m)	1	13090	0.43	2	3273	0.85	3	1454	1.28	4	818	1.70	5	524	2.13
h(m)	E(lx)	D(m)																	
1	13090	0.43																	
2	3273	0.85																	
3	1454	1.28																	
4	818	1.70																	
5	524	2.13																	
Light distribution																			
	Flood																		
Weight	1.52 kg																		


Technical data	CB6-W24WFAA / CB6-B24WFAA																		
	27 W / 1860 lm ^[1]	3000K-Warm White																	
	Colour rendition index (Typ.)	Ra.97 R9.90																	
	Target Center Point (cx, cy)	(0.434,0.403)																	
	Dimming range (Flicker free)	0.1%-100%																	
Photometrics																			
	<table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>1</td><td>4686</td><td>0.65</td></tr><tr><td>2</td><td>1172</td><td>1.30</td></tr><tr><td>3</td><td>521</td><td>1.95</td></tr><tr><td>4</td><td>293</td><td>2.60</td></tr><tr><td>5</td><td>187</td><td>3.25</td></tr></table>	h(m)	E(lx)	D(m)	1	4686	0.65	2	1172	1.30	3	521	1.95	4	293	2.60	5	187	3.25
h(m)	E(lx)	D(m)																	
1	4686	0.65																	
2	1172	1.30																	
3	521	1.95																	
4	293	2.60																	
5	187	3.25																	
Light distribution																			
	Wide Flood																		
Weight	1.52 kg																		

Technical data	CB6-W24WFAB / CB6-B24WFAB																		
	27 W / 1960 lm ^[1]	3500K-Warm White																	
	Colour rendition index (Typ.)	Ra.97 R9.90																	
	Target Center Point (cx, cy)	(0.407,0.392)																	
	Dimming range (Flicker free)	0.1%-100%																	
Photometrics																			
	<table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>1</td><td>4938</td><td>0.65</td></tr><tr><td>2</td><td>1235</td><td>1.30</td></tr><tr><td>3</td><td>549</td><td>1.95</td></tr><tr><td>4</td><td>309</td><td>2.60</td></tr><tr><td>5</td><td>198</td><td>3.25</td></tr></table>	h(m)	E(lx)	D(m)	1	4938	0.65	2	1235	1.30	3	549	1.95	4	309	2.60	5	198	3.25
h(m)	E(lx)	D(m)																	
1	4938	0.65																	
2	1235	1.30																	
3	549	1.95																	
4	309	2.60																	
5	198	3.25																	
Light distribution																			
	Wide Flood																		
Weight	1.52 kg																		

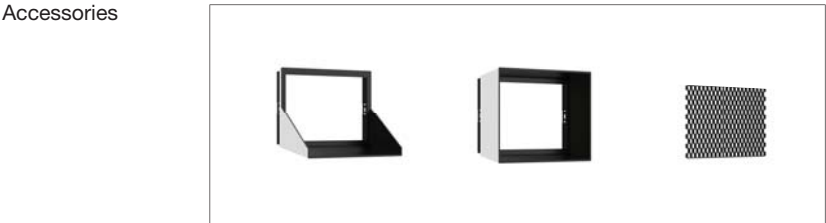[1]: Measurement precision accordance with Commission Delegated Regulation (EU)2019/2015.



Model 4

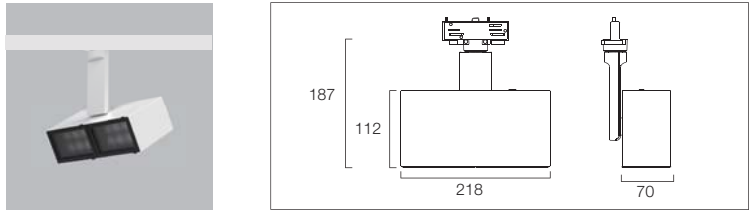

CB6-W24WFAC / CB6-B24WFAC

Technical data

27 W / 2050 lm ^[1]	4000K-Neutral White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.382,0.380)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D(m)
	1	5165	0.65
	2	1291	1.30
	3	574	1.95
	4	323	2.60
	5	207	3.25

Light distribution

Wide Flood

Weight

1.52 kg

CB6-W24EWFAA / CB6-B24EWFAA

Technical data

27 W / 1860 lm ^[1]	3000K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.434,0.403)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D(m)
	1	2996	0.89
	2	749	1.78
	3	333	2.67
	4	187	3.56
	5	120	4.45

Light distribution

Extra Wide Flood

Weight

1.52 kg

CB6-W24EWFAB / CB6-B24EWFAB

Technical data

27 W / 1960 lm ^[1]	3500K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.407,0.392)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D(m)
	1	3157	0.89
	2	789	1.78
	3	351	2.67
	4	197	3.56
	5	126	4.45

Light distribution

Extra Wide Flood

Weight

1.52 kg

CB6-W24EWFAC / CB6-B24EWFAC

Technical data

27 W / 2050 lm ^[1]	4000K-Neutral White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.382,0.380)
Dimming range (Flicker free)	0.1%-100%

Photometrics


	h(m)	E(lx)	D(m)
	1	3302	0.89
	2	825	1.78
	3	367	2.67
	4	206	3.56
	5	132	4.45

Light distribution


Extra Wide Flood

Weight

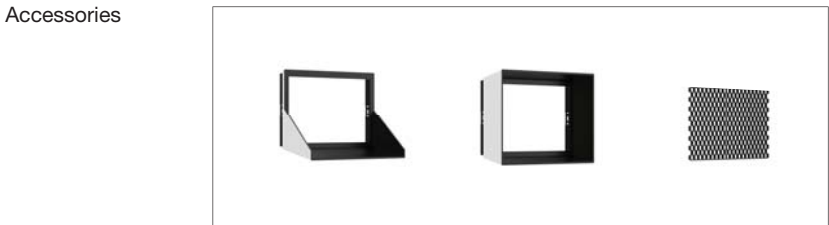1.52 kg



Model 4

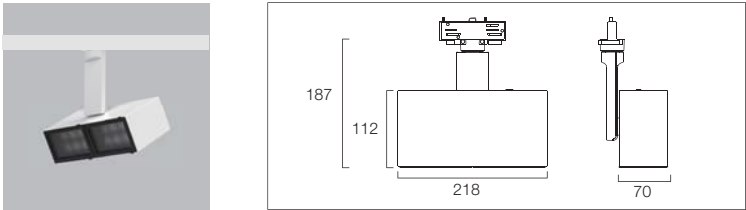


CB6-W24OFAA / CB6-B24OFAA


Technical data

27 W / 1860 lm ^[1]	3000K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.434,0.403)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	<table><tr><th>h(m)</th><th>E(lx)</th><th>D-C0(m)</th><th>D-C90(m)</th></tr><tr><td></td><td></td><td>16°</td><td>64°</td></tr><tr><td>1</td><td>4405</td><td>0.28</td><td>1.25</td></tr><tr><td>2</td><td>1101</td><td>0.56</td><td>2.50</td></tr><tr><td>3</td><td>489</td><td>0.84</td><td>3.75</td></tr><tr><td>4</td><td>275</td><td>1.12</td><td>5.00</td></tr><tr><td>5</td><td>176</td><td>1.41</td><td>6.25</td></tr></table>	h(m)	E(lx)	D-C0(m)	D-C90(m)			16°	64°	1	4405	0.28	1.25	2	1101	0.56	2.50	3	489	0.84	3.75	4	275	1.12	5.00	5	176	1.41	6.25
h(m)	E(lx)	D-C0(m)	D-C90(m)																										
		16°	64°																										
1	4405	0.28	1.25																										
2	1101	0.56	2.50																										
3	489	0.84	3.75																										
4	275	1.12	5.00																										
5	176	1.41	6.25																										

Light distribution



Oval Flood



Weight


1.52 kg

CB6-W24OFAB / CB6-B24OFAB


Technical data

27 W / 1960 lm ^[1]	3500K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.407,0.392)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	<table><tr><th>h(m)</th><th>E(lx)</th><th>D-C0(m)</th><th>D-C90(m)</th></tr><tr><td></td><td></td><td>16°</td><td>64°</td></tr><tr><td>1</td><td>4642</td><td>0.28</td><td>1.25</td></tr><tr><td>2</td><td>1161</td><td>0.56</td><td>2.50</td></tr><tr><td>3</td><td>516</td><td>0.84</td><td>3.75</td></tr><tr><td>4</td><td>290</td><td>1.12</td><td>5.00</td></tr><tr><td>5</td><td>186</td><td>1.41</td><td>6.25</td></tr></table>	h(m)	E(lx)	D-C0(m)	D-C90(m)			16°	64°	1	4642	0.28	1.25	2	1161	0.56	2.50	3	516	0.84	3.75	4	290	1.12	5.00	5	186	1.41	6.25
h(m)	E(lx)	D-C0(m)	D-C90(m)																										
		16°	64°																										
1	4642	0.28	1.25																										
2	1161	0.56	2.50																										
3	516	0.84	3.75																										
4	290	1.12	5.00																										
5	186	1.41	6.25																										

Light distribution



Oval Flood



Weight


1.52 kg

CB6-W24OFAC / CB6-B24OFAC


Technical data

27 W / 2050 lm ^[1]	4000K-Neutral White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.382,0.380)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	<table><tr><th>h(m)</th><th>E(lx)</th><th>D-C0(m)</th><th>D-C90(m)</th></tr><tr><td></td><td></td><td>16°</td><td>64°</td></tr><tr><td>1</td><td>4855</td><td>0.28</td><td>1.25</td></tr><tr><td>2</td><td>1214</td><td>0.56</td><td>2.50</td></tr><tr><td>3</td><td>539</td><td>0.84</td><td>3.75</td></tr><tr><td>4</td><td>303</td><td>1.12</td><td>5.00</td></tr><tr><td>5</td><td>194</td><td>1.41</td><td>6.25</td></tr></table>	h(m)	E(lx)	D-C0(m)	D-C90(m)			16°	64°	1	4855	0.28	1.25	2	1214	0.56	2.50	3	539	0.84	3.75	4	303	1.12	5.00	5	194	1.41	6.25
h(m)	E(lx)	D-C0(m)	D-C90(m)																										
		16°	64°																										
1	4855	0.28	1.25																										
2	1214	0.56	2.50																										
3	539	0.84	3.75																										
4	303	1.12	5.00																										
5	194	1.41	6.25																										

Light distribution



Oval Flood



Weight


1.52 kg

CB6-W24WWAA / CB6-B24WWAA


Technical data

27 W / 1860 lm ^[1]	3000K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.434,0.403)
Dimming range (Flicker free)	0.1%-100%


Photometrics

	<table><tr><td>Mean illuminance En (wall)</td><td></td></tr><tr><td>Angle of tilt 35°</td><td></td></tr><tr><td>Wall height (m)</td><td>6.0</td></tr><tr><td>Offset from wall (m)</td><td>2.0</td></tr><tr><td>Luminaire spacing (m)</td><td>2.0</td></tr><tr><td>Illuminance En (lx)</td><td>116</td></tr></table>	Mean illuminance En (wall)		Angle of tilt 35°		Wall height (m)	6.0	Offset from wall (m)	2.0	Luminaire spacing (m)	2.0	Illuminance En (lx)	116
Mean illuminance En (wall)													
Angle of tilt 35°													
Wall height (m)	6.0												
Offset from wall (m)	2.0												
Luminaire spacing (m)	2.0												
Illuminance En (lx)	116												

Light distribution




Wallwash
h:a:d=3:1:1.5




Weight



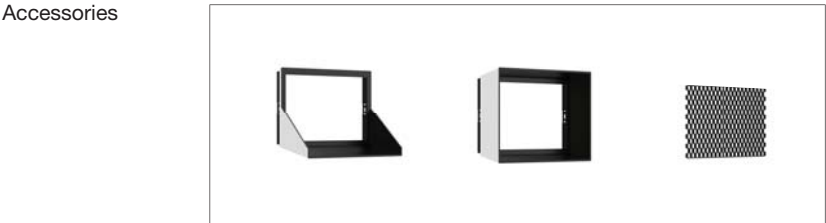
1.52 kg




Model 4

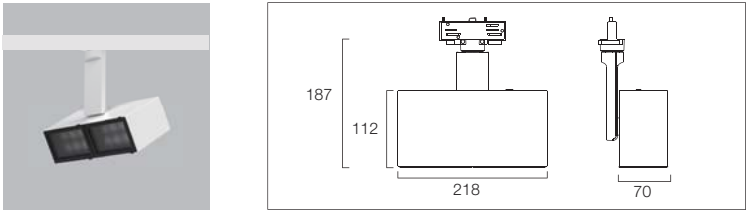




CB6-W24WWAB / CB6-B24WWAB

Technical data	27 W / 1960 lm ^[1]		3500K-Warm White	
	Colour rendition index (Typ.)	Ra.97 R9.90		
	Target Center Point (cx, cy)	(0.407,0.392)		
	Dimming range (Flicker free)	0.1%-100%		
Photometrics				
	Mean illuminance En (wall) Angle of tilt 35° Wall height (m) 6.0 Offset from wall (m) 2.0 Luminaire spacing (m) 2.0 Illuminance En (lx) 123			
Light distribution				
	Wallwash h:a:d=3:1:1.5			
Weight				
	1.52 kg			

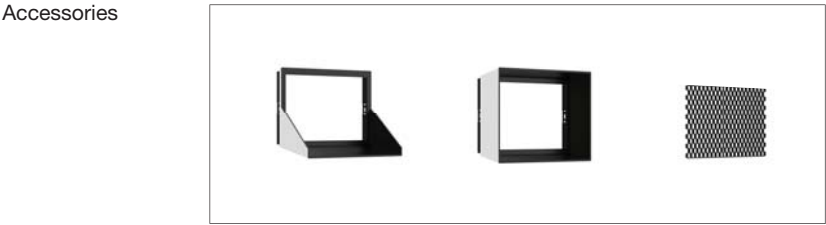
[1]: Measurement precision accordance with Commission Delegated Regulation (EU)2019/2015.



CB6-W24WWAC / CB6-B24WWAC

27 W / 2050 lm ^[1]		4000K-Neutral White	
Colour rendition index (Typ.)		Ra.97 R9.90	
Target Center Point (cx, cy)		(0.382,0.380)	
Dimming range (Flicker free)		0.1%-100%	
		Mean illuminance E_n (wall) Angle of tilt 35° Wall height (m) 6.0 Offset from wall (m) 2.0 Luminaire spacing (m) 2.0 Illuminance E_n (lx) 128	
			
Wallwash h:a:d=3:1:1.5			
1.52 kg			

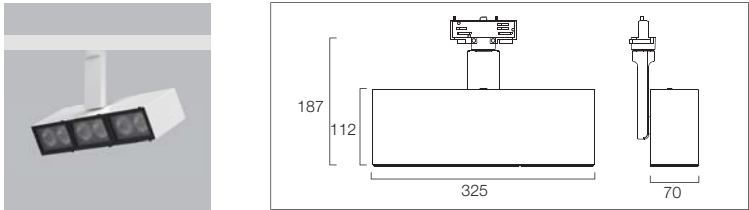Model 5




CB6-W12NAA / CB6-B12NAA


Technical data

14 W / 930 lm ^[1]	3000K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.434,0.403)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D(m)
			5°
	1	58643	0.09
	2	14661	0.17
	3	6516	0.26
	4	3665	0.35
5	2346	0.44	




Light distribution





Narrow Spot


Weight

2.10 kg


CB6-W12NAB / CB6-B12NAB			
14 W / 930 lm ^[1]		3500K-Warm White	
Colour rendition index (Typ.)	Ra.97 R9.90		
Target Center Point (cx, cy)	(0.407,0.392)		
Dimming range (Flicker free)	0.1%-100%		
	h(m)	E(lx)	D(m)
			5°
	1	61795	0.09
	2	15449	0.17
	3	6866	0.26
	4	3862	0.35
	5	2472	0.44
			
	Narrow Spot		
			
2.10 kg			

CB6-W12NAC / CB6-B12NAC			
14 W / 1030 lm ^[1]		4000K-Neutral White	
Colour rendition index (Typ.)	Ra.97 R9.90		
Target Center Point (cx, cy)	(0.382,0.380)		
Dimming range (Flicker free)	0.1%-100%		
	h(m)	E(lx)	D(m)
			5°
	1	64948	0.09
	2	16237	0.17
	3	7216	0.26
	4	4059	0.35
	5	2598	0.44
			
	Narrow Spot		
			
2.10 kg			

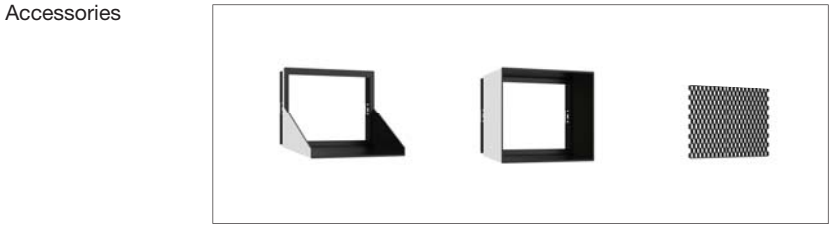[1]: Measurement precision accordance with Commission Delegated Regulation (EU)2019/2015.



Model 6

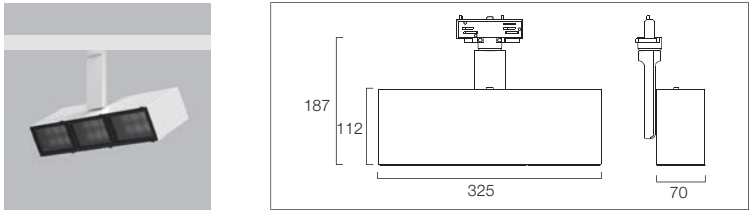

CB6-W36SAA / CB6-B36SAA

Technical data

41 W / 2790 lm ^[1]	3000K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.434,0.403)
Dimming range (Flicker free)	0.1%-100%

Photometrics




	h(m)	E(lx)	D(m)
			12°
	1	40716	0.21
	2	10179	0.42
	3	4524	0.63
	4	2545	0.84
	5	1629	1.05




Light distribution




Spot

Weight


2.08 kg

CB6-W36SAB / CB6-B36SAB																							
41 W / 2930 lm ^[1]		3500K-Warm White																					
Colour rendition index (Typ.)	Ra.97 R9.90																						
Target Center Point (cx, cy)	(0.407,0.392)																						
Dimming range (Flicker free)	0.1%-100%																						
	<table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td></td><td></td><td>12°</td></tr><tr><td>1</td><td>42759</td><td>0.21</td></tr><tr><td>2</td><td>10690</td><td>0.42</td></tr><tr><td>3</td><td>4751</td><td>0.63</td></tr><tr><td>4</td><td>2672</td><td>0.84</td></tr><tr><td>5</td><td>1710</td><td>1.05</td></tr></table>	h(m)	E(lx)	D(m)			12°	1	42759	0.21	2	10690	0.42	3	4751	0.63	4	2672	0.84	5	1710	1.05	
h(m)	E(lx)	D(m)																					
		12°																					
1	42759	0.21																					
2	10690	0.42																					
3	4751	0.63																					
4	2672	0.84																					
5	1710	1.05																					
																							
Spot																							
2.08 kg																							


CB6-W36SAC / CB6-B36SAC																							
41 W / 3080 lm ^[1]		4000K-Neutral White																					
Colour rendition index (Typ.)	Ra.97 R9.90																						
Target Center Point (cx, cy)	(0.382,0.380)																						
Dimming range (Flicker free)	0.1%-100%																						
	<table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td></td><td></td><td>12°</td></tr><tr><td>1</td><td>44948</td><td>0.21</td></tr><tr><td>2</td><td>11237</td><td>0.42</td></tr><tr><td>3</td><td>4994</td><td>0.63</td></tr><tr><td>4</td><td>2809</td><td>0.84</td></tr><tr><td>5</td><td>1798</td><td>1.05</td></tr></table>	h(m)	E(lx)	D(m)			12°	1	44948	0.21	2	11237	0.42	3	4994	0.63	4	2809	0.84	5	1798	1.05	
h(m)	E(lx)	D(m)																					
		12°																					
1	44948	0.21																					
2	11237	0.42																					
3	4994	0.63																					
4	2809	0.84																					
5	1798	1.05																					
																							
Spot																							
2.08 kg																							

CB6-W36FAA / CB6-B36FAA			
41 W / 2790 lm ^[1]		3000K-Warm White	
Colour rendition index (Typ.)	Ra.97 R9.90		
Target Center Point (cx, cy)	(0.434,0.403)		
Dimming range (Flicker free)	0.1%-100%		
	h(m)	E(lx)	D(m)
			24°
	1	17815	0.43
	2	4454	0.85
	3	1979	1.28
	4	1113	1.70
	5	713	2.13
			
Flood			
			
2.08 kg			

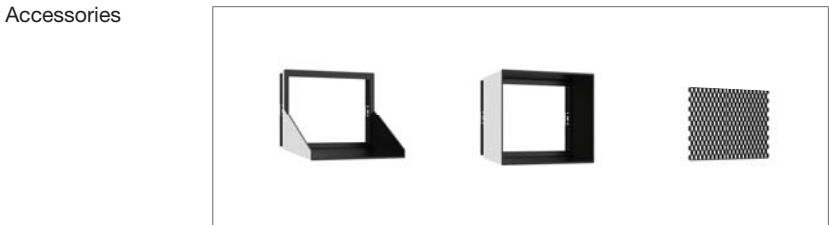[1]: Measurement precision accordance with Commission Delegated Regulation (EU)2019/2015.



Model 6

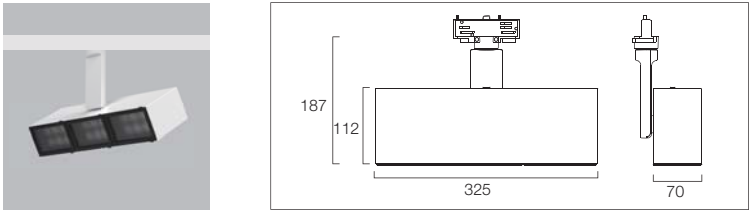

Technical data

41 W / 2930 lm ^[1]	3500K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.407,0.392)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D(m)
	1	18709	0.43
	2	4677	0.85
	3	2079	1.28
	4	1169	1.70
	5	748	2.13

Light distribution

Flood

Weight

2.08 kg

Technical data

41 W / 3080 lm ^[1]	4000K-Neutral White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.382,0.380)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D(m)
	1	19667	0.43
	2	4917	0.85
	3	2185	1.28
	4	1229	1.70
	5	787	2.13

Light distribution

Flood

Weight

2.08 kg

Technical data

41 W / 2790 lm ^[1]	3000K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.434,0.403)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D(m)
	1	7029	0.65
	2	1757	1.30
	3	781	1.95
	4	439	2.60
	5	281	3.25

Light distribution

Wide Flood

Weight

2.08 kg

Technical data

41 W / 2930 lm ^[1]	3500K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.407,0.392)
Dimming range (Flicker free)	0.1%-100%

Photometrics


	h(m)	E(lx)	D(m)
	1	7382	0.65
	2	1846	1.30
	3	820	1.95
	4	461	2.60
	5	295	3.25

Light distribution


Wide Flood



Weight


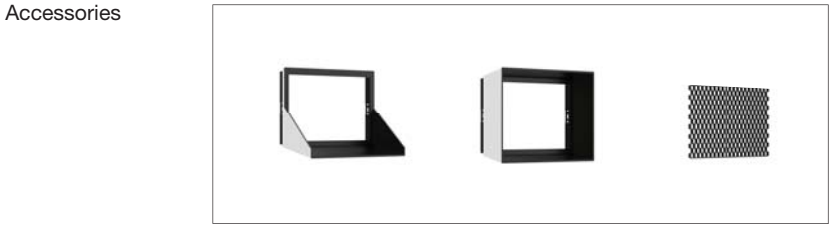
2.08 kg







Model 6

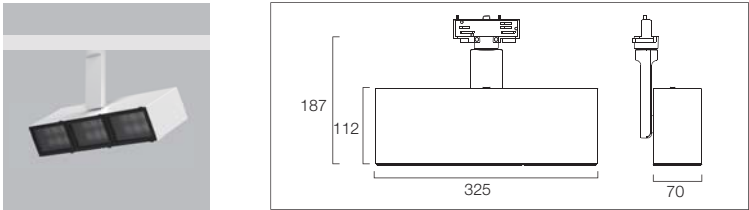


Technical data	CB6-W36WFAC / CB6-B36WFAC	
	41 W / 3080 lm ^[1]	4000K-Neutral White
	Colour rendition index (Typ.)	Ra.97 R9.90
	Target Center Point (cx, cy)	(0.382,0.380)
Photometrics	Dimming range (Flicker free)	0.1%-100%
		
	h(m)	E(lx) D(m)
	1 7760 0.65	36°
Light distribution	2 1940 1.30	
	3 862 1.95	
	4 485 2.60	
	5 310 3.25	
Weight		
	Wide Flood	
		
	2.08 kg	


Technical data	CB6-W36EWFAA / CB6-B36EWFAA	
	41 W / 2790 lm ^[1]	3000K-Warm White
	Colour rendition index (Typ.)	Ra.97 R9.90
	Target Center Point (cx, cy)	(0.434,0.403)
Photometrics	Dimming range (Flicker free)	0.1%-100%
		
	h(m)	E(lx) D(m)
	1 4493 0.89	48°
Light distribution	2 1123 1.78	
	3 499 2.67	
	4 281 3.56	
	5 180 4.45	
Weight		
	Extra Wide Flood	
		
	2.08 kg	

Technical data	CB6-W36EWFAB / CB6-B36EWFAB	
	41 W / 2930 lm ^[1]	3500K-Warm White
	Colour rendition index (Typ.)	Ra.97 R9.90
	Target Center Point (cx, cy)	(0.407,0.392)
Photometrics	Dimming range (Flicker free)	0.1%-100%
		
	h(m)	E(lx) D(m)
	1 4719 0.89	48°
Light distribution	2 1180 1.78	
	3 524 2.67	
	4 295 3.56	
	5 189 4.45	
Weight		
	Extra Wide Flood	
		
	2.08 kg	

Technical data	CB6-W36EWFAC / CB6-B36EWFAC	
	41 W / 3080 lm ^[1]	4000K-Neutral White
	Colour rendition index (Typ.)	Ra.97 R9.90
	Target Center Point (cx, cy)	(0.382,0.380)
Photometrics	Dimming range (Flicker free)	0.1%-100%
		
	h(m)	E(lx) D(m)
	1 4960 0.89	48°
Light distribution	2 1240 1.78	
	3 551 2.67	
	4 310 3.56	
	5 198 4.45	
Weight		
	Extra Wide Flood	
		
	2.08 kg	

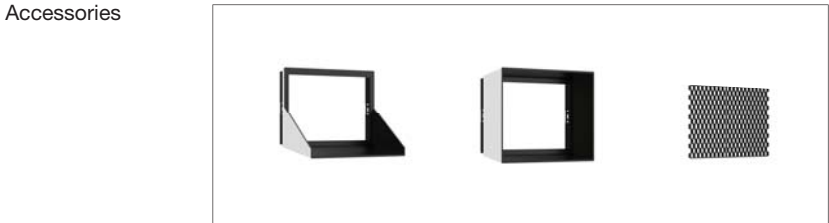

Model 6

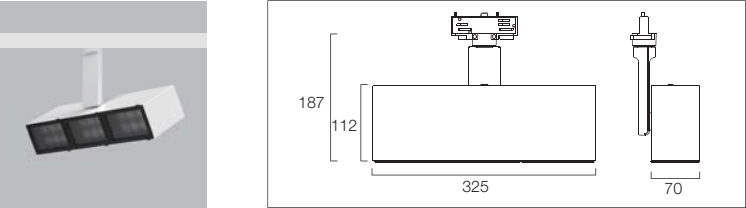

CB6-W36OFAA / CB6-B36OFAA

Technical data

41 W / 2790 lm ^[1]	3000K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.434,0.403)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D-C0(m)	D-C90(m)
			16°	64°
1	6608	0.28	1.25	
2	1652	0.56	2.50	
3	734	0.84	3.75	
4	413	1.12	5.00	
5	264	1.41	6.25	

Light distribution

Oval Flood

Weight

2.08 kg

CB6-W36OFAB / CB6-B36OFAB

Technical data

41 W / 2930 lm ^[1]	3500K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.407,0.392)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D-C0(m)	D-C90(m)
			16°	64°
1	6940	0.28	1.25	
2	1735	0.56	2.50	
3	771	0.84	3.75	
4	434	1.12	5.00	
5	278	1.41	6.25	

Light distribution

Oval Flood

Weight

2.08 kg

CB6-W36OFAC / CB6-B36OFAC

Technical data

41 W / 3080 lm ^[1]	4000K-Neutral White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.382,0.380)
Dimming range (Flicker free)	0.1%-100%

Photometrics

	h(m)	E(lx)	D-C0(m)	D-C90(m)
			16°	64°
1	7295	0.28	1.25	
2	1824	0.56	2.50	
3	811	0.84	3.75	
4	456	1.12	5.00	
5	292	1.41	6.25	

Light distribution

Oval Flood

Weight

2.08 kg

CB6-W36WWAA / CB6-B36WWAA

Technical data

41 W / 2790 lm ^[1]	3000K-Warm White
Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.434,0.403)
Dimming range (Flicker free)	0.1%-100%

Photometrics


	h(m)	E(lx)	D-C0(m)	D-C90(m)
			16°	64°
1	6608	0.28	1.25	
2	1652	0.56	2.50	
3	734	0.84	3.75	
4	413	1.12	5.00	
5	264	1.41	6.25	

Light distribution


Wallwash
h:a:d=3:1:1.5

Weight

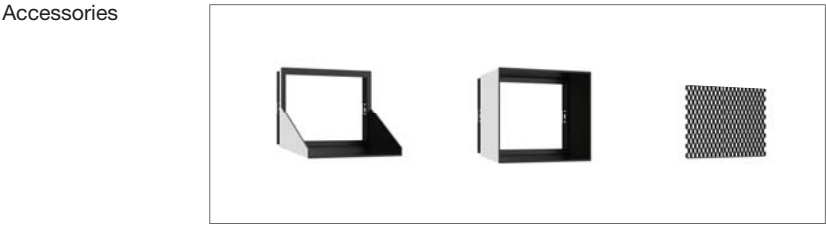2.08 kg



Model 6

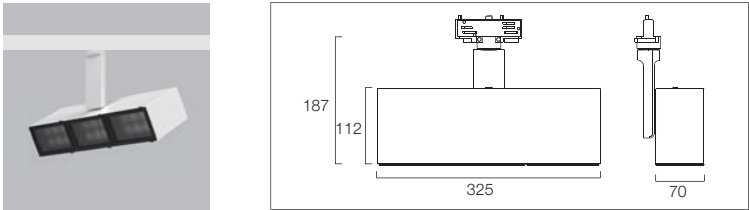



CB6-W36WWAB / CB6-B36WWAB

Technical data

41 W / 2930 lm ^[1]	3500K-Warm White
-------------------------------	------------------

Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.407,0.392)
Dimming range (Flicker free)	0.1%-100%

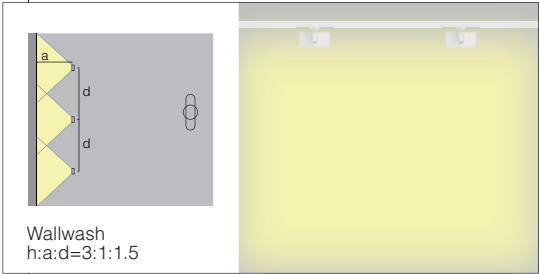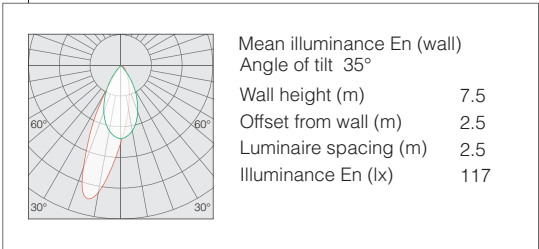Photometrics



Weight

2.08 kg

[1]: Measurement precision accordance with Commission Delegated Regulation (EU)2019/2015.



Accessories



CB6-W36WWAC / CB6-B36WWAC

41 W / 3080 lm ^[1]	4000K-Neutral White
-------------------------------	---------------------

Colour rendition index (Typ.)	Ra.97 R9.90
Target Center Point (cx, cy)	(0.382,0.380)
Dimming range (Flicker free)	0.1%-100%

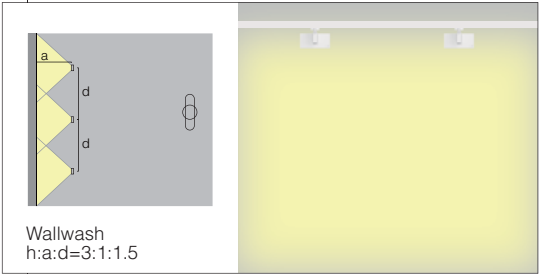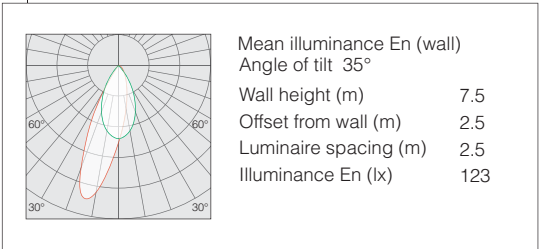

2.08 kg
